



RECYFIX®NC 100

RECYFIX®NC 100, class D 400, Type 01 with ductile iron grating, black, SW 10 mm heelsafe , 8-times bolted

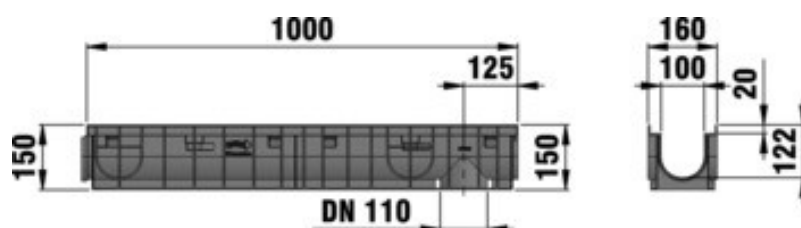

D 400



■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Internal channel cross-sect. cm ²	Inlaying depth	Item-no.
1000	160	150	10,672	427	92	20	48771

■ Product description:

RECYFIX NC 100 type 01 - channel made of modified PP, with integrated angle housing, according to EN 1433, with vertical connection possibility DN/OD 110, ductile iron grating consists of ductile graphite iron EN-GJS, Slot Width 10 mm heelsafe, black , with horizontal thrusts resistance, eightfold locking, loading class A 15 - D 400, not for use across the carriageway of highways or motorways in moving traffic, L/W/H 1000x160x150mm, item no. 48771

■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Steel black galvanised
- **Grating:** Ductile iron GJS 500-7

■ Type acc. DIN EN 1433:

M

■ Set of rules:

DIN 19580/EN 1433

■ Application areas:

- Filling stations, decanting stations
- Facade drainage
- Fire brigade buildings
- Pedestrian zones
- Gardening and landscaping



- Multi storey car parks
- Sewage plants
- Market squares, markets
- Exhibition grounds, trade fairs
- Public areas and squares
- Car parking facilities
- Cityscapes with architectural value
- Ramps, Access to underground car parks
- Car-Wash facilities
- School yards
- Underground car parks, multi-storey car parks
- Access drives private

The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!